

# Traditional 2500

## Window Energy Ratings

### IGU Spec


4mm Optiwhite or Diamant  
 20mm Argon (90%)  
 4mm Climaguard A+  
 Swisspacer Ultimate

Profile Spec	WER Index	WER Band
TCI to frame and sash, steel to mullion	10.40	A* 10
Steel to mullion only	9.03	A+ 9
Steel to sash verticals & mullion	7.66	A+ 8
Steel to all sash members & mullion	6.97	A+ 7
Steel to frame, sash & mullion	4.92	A+ 5

As above, no low iron

Profile Spec	WER Index	WER Band
TCI to frame and sash, steel to mullion	3.84	A 4
Steel to mullion only	2.47	A 3
Steel to sash verticals & mullion	1.10	A 1
Steel to all sash members & mullion	0.42	A 0
Steel to frame, sash & mullion	-1.64	B -2

Profile Spec	WER Index	WER Band
Steel to mullion only plus flipper seals x 2	9.71	A* 10

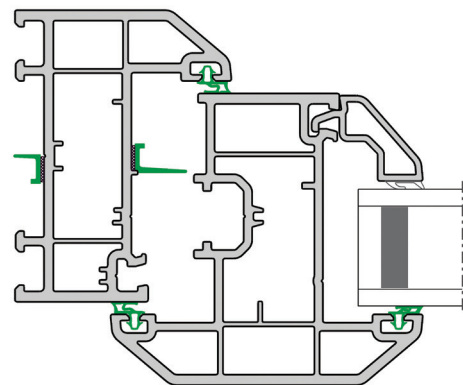

**deceuninck**

Deceuninck Limited • Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX  
 T 01249 816 969 • F 01249 815 234 • [deceuninck.ltd@deceuninck.com](mailto:deceuninck.ltd@deceuninck.com) • [www.deceuninck.co.uk](http://www.deceuninck.co.uk)

# Traditional 2500

## Window Energy Ratings Triple Glazing


### IGU Spec

4mm Optiwhite or Diamant  
 14mm Argon (90%)  
 4mm Climaguard A+  
 14mm Argon (90%)  
 4mm Climaguard A+  
 Swisspacer Ultimate

Profile Spec	WER Index	WER Band
Steel to sash verticals & mullion	23.31	A* 23
Steel to all sash members & mullion	22.63	A* 23
Steel to frame, sash & mullion	19.20	A* 19

As above, no low iron

Profile Spec	WER Index	WER Band
Steel to sash verticals & mullion	18.94	A* 19
Steel to all sash members & mullion	18.26	A* 18
Steel to frame, sash & mullion	14.83	A* 15

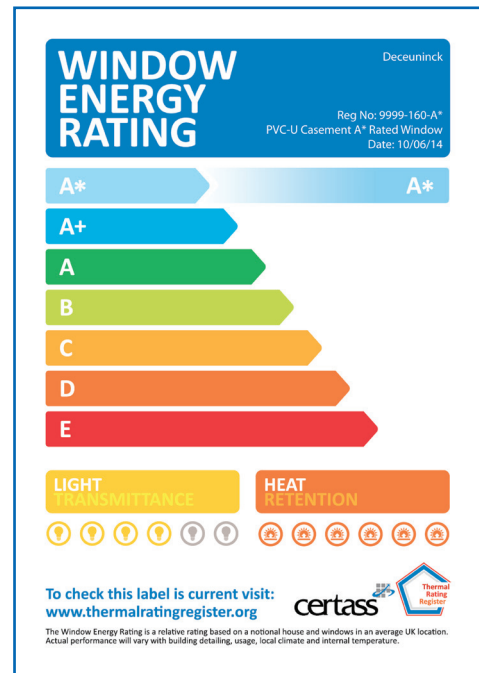

**deceuninck**

Deceuninck Limited • Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX  
 T 01249 816 969 • F 01249 815 234 • [deceuninck.ltd@deceuninck.com](mailto:deceuninck.ltd@deceuninck.com) • [www.deceuninck.co.uk](http://www.deceuninck.co.uk)